




LAC 650 SL

680 G/M² PES/PVC




LAC 650 SL

5 ANS*
YEARS
GARANTIE - WARRANTY




L65S 7310

3.00 m x 30-60-250 ml
2.50 m x 60-250 ml




L65S 0867

(RAL 9010)
3.00 m x 30-60-250 ml
2.50 m x 60-250 ml



L65S 7462

3.00 m x 30-60-250 ml
2.50 m x 60-250 ml




L65S 7457

3.00 m x 30-60 ml




L65S 7458

(RAL 1015)
3.00 m x 30-60 ml




L65S 7409

3.00 m x 30-60-250 ml




L65S 0654

3.00 m x 30-60-250 ml




L65S 7379

(RAL 7040)
3.00 m x 30-60 ml




L65S 0652

3.00 m x 30-60 ml




L65S 0939

3.00 m x 30-60-250 ml



L65S 7534

3.00 m x 30-60 ml




L65S 0887

(RAL 8017*)
3.00 m x 30-60 ml




L65S 7426

3.00 m x 30-60 ml



L65S 7419

3.00 m x 30-60-250 ml



L65S 0810


(RAL 9005)
3.00 m x 30-60-250 ml



L65S 7309

(RAL 5013)
3.00 m x 30-60 ml





L65S 0567
3.00 m x 30-60 ml



L65S 0995
(RAL 6026)
3.00 m x 30-60-250 ml



L65S 7539
(RAL 6018*)
3.00 m x 30-60 ml



L65S 7533
3.00 m x 30-60 ml



L65S 7500
3.00 m x 30-60 ml



L65S 7507
(RAL 3002*)
3.00 m x 30-60-250 ml



L65S 7538
3.00 m x 30-60 ml




L65S 7456
(RAL 1003)
3.00 m x 30-60 ml



L65S 0941
3.00 m x 30-60-250 ml



L65S 7450
(RAL 5015)
3.00 m x 30-60-250 ml



L65S 7522
3.00 m x 30-60 ml

LAC 650 SL CARBON



L65C 7542
3.00 m x 30-60 ml




































































L65C 7541
3.00 m x 30-60 ml



L65C 7540
3.00 m x 30-60 ml

LAC 650 SL

COLOR			Gtot EXT			
7310	74	14	0,09		9	
867	75	12	0,09		11	
7462	73	16	0,09		9	
7457	66	26	0,07		6	
7458	68	24	0,08		5	
7409	54	41	0,07		0,2	
939	28	72	0,06		0	
654	46	54	0,05		0	
7379	32	68	0,06		0	
652	26	74	0,07		0	
7534	14	86	0,08		0	
887	14	86	0,08		0	
7426	8	92	0,09		0	
7419	6	94	0,09		0	
810	5	95	0,09		0	
7309	9	90	0,09		0	
567	35	59	0,1		0	
995	22	72	0,06		0	
7539	38	56	0,09		0,5	
7533	56	34	0,1		7	
7500	47	42	0,11		0,7	
7507	24	71	0,1		0,2	
7538	53	36	0,1		3,2	
7456	53	35	0,11		7	
941	27	66	0,1		0	
7450	31	65	0,08		0	
7522	38	62	0,07		0	
7542	35	59	0,1		0	
7541	14	86	0,08		0	
7540	6	94	0,09		0	



Solar Reflexion (%)
Réflexion Solaire (%) / Wärme Reflektion (%)
Reflexión Solar (%) / Riflessione Solare (%)



Solar Absorption (%)
Absorption Solaire (%) / Wärme Absorption (%)
Absorción Solar (%) / Assorbimento Solare (%)



Solar factor of the combination of fabric + reference glazing C
Facteur solaire de l'ensemble toile + vitrage de référence C
Gesamtenergiedurchlassgrad der Kombination Verglasung C + Sonnenschutz
Factor solar de la combinación del tejido + vidrio de referencia C
Fattore solare dell'insieme telo + vetro di riferimento C



Opaque
Opaque / Opak / Opaco / Opaco



Thermal Comfort
Confort Thermique / Wärme-Komfort
Confort Térmico / Comfort Termico



Visual Transmission (%)
Transmission Visuelle (%) / Licht Transmission (%)
Transmisión Visual (%) / Trasmissione Visiva (%)



Visual Protection
Protection Visuelle / Visueller Schutz
Protección Visual / Protezione Visiva



UV Protection 100%
Protection UV 100% / UV-Schutz 100%
Protección UV 100% / Protezione U.V. 100%

Lac 650 SL

Base cloth <i>Support / Trägergewebe</i> <i>Soporte / Supporto</i>	1100 dtex PES HT
Width <i>Laize / Breite / Ancho / Altezza</i>	2.50 - 3.00 m
Coating <i>Enduction / Beschichtung</i> <i>Revestimiento / Spalmatura</i>	PVC (Lowick)
Finish <i>Finition / Ausstattung / Acabado / Finizione</i>	Cleangard
Total weight <i>Poids Total / Gesamtgewicht</i> <i>Peso total / Peso totale</i>	680 g/m ²
Tensile strength > NF EN ISO 1421 <i>Résistance rupture / Reißfestigkeit /</i> <i>Resistencia a la rotura / Resistenza alla rottura</i>	260/250 daN/5cm
Tear strength > DIN 53363 <i>Résistance déchirure / Weiterreißfestigkeit</i> <i>Resistencia al desgarro / Resistenza allo strappo</i>	32/28 daN
Adhesion > NF EN ISO 2411 <i>Adhérence / Haftung / Adherencia / Aderenza</i>	8 daN / 5 cm
Elongation under load (W / W) > NF EN 15619 <i>Allongement sous charge (Ch / Tr)</i> <i>Verbleibende Verformung (K / S)</i> <i>Alargamiento bajo carga (urdimbre / trama)</i> <i>Allungamento sotto carico (ordito / trama)</i>	<1% / <2%
Residual deformation (W / W) > NF EN 15619 <i>Déformation résiduelle (Ch / Tr)</i> <i>Dehnung unter Last (K / S)</i> <i>Deformación residual (urdimbre / trama)</i> <i>Deformazione residua (ordito / trama)</i>	<0.4% / <0.8%
Temperature resistance > NF EN 1876-2 <i>Températures d'utilisation</i> <i>Temperaturbeständigkeit</i> <i>Resistencia máxima a la temperatura</i> <i>Resistenza alla temperatura</i>	-30°C +70°C (24h)
Flame Retardancy > NF P 92503 / DIN 4102 / BS 7837 <i>Ignifugation / Brennverhalten</i> <i>Ignifugación / Ignifugazione</i>	M2 / B1 / BS NFPA701 B-S2-D0

Average values, non-contractual
Valeurs moyennes, non-contractuelles / Alle angegebenen Werte sind ca.Werte / Valores medios y no contractuales / Questi valori medi non hanno valore contrattuale



Dickson PVC fabrics are recyclable

 Les produits PVC Dickson sont recyclables

 Alle PVC-beschichteten Dickson Produkte sind recyclebar

 Todos los artículos recubiertos de PVC Dickson son reciclables

 Tutti i prodotti in PVC Dickson sono riciclabili



All PVC coated fabrics can be slit

 Tous les articles enduits PVC sont tronçonnables

 Für alle PVC-beschichteten Produkte gibt es den Schneide-Service

 Todos los artículos recubiertos de PVC se pueden cortar

 Tutti i prodotti spalmati in PVC si possono tagliare nella misura desiderata



Other colours are available on special production

 Autres coloris possibles sur fabrications spéciales





 Andere Farbe mit Sonderproduktion möglich

 Otros colores disponibles bajo pedido mínimo


 È possibile realizzare colori diversi per produzioni speciali

SYSTEM LOWICK

Dickson's unique anti-wicking process helps the fabric to last longer and look like new.

-  *Traitement spécifique à Dickson pour empêcher la moisissure par capillarité. Le tissu dure plus longtemps et garde son aspect d'origine.*
-  *Das einzigartige Herstellungsverfahren von Dickson verhindert Schimmelbildung. Das Gewebe hat eine längere Lebensdauer und behält seine ursprüngliche Optik.*
-  *Tratamiento específico de Dickson para evitar el moho por capilaridad, ayuda al tejido a durar más tiempo y se vea como nuevo.*
-  *Trattamento specifico Dickson per impedire la muffa per capillarità. Il tessuto aumenta la sua durata nel tempo mantenendo il suo aspetto originale.*


Classic coatings

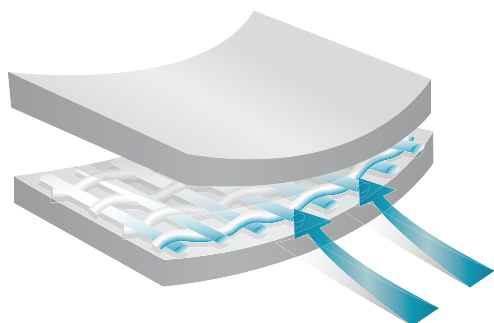

Moisture penetration

Enduction classique : pénétration de l'humidité
Klassisches Beschichtungsverfahren : feuchtigkeitsdurchdringung
Recubrimiento clásico : penetración de humedad
Spalmatura classica : penetrazione dell'umidità

Dickson's LOWICK System

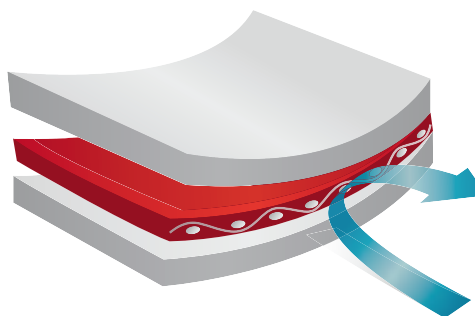





Total coating impregnation of the yarn

Imprégnation totale des fils dans la matière
Vollständige Imprégnierung des Garns im Gewebe
Impregnación total del hilo del material
Impregnazione totale dei fili nel materiale

FINITION CLEANGARD

The smooth Cleangard topcoat lacquer prevents soiling and facilitates cleaning. A solid protection against weathering.

-  *Traitement sur les deux faces pour un état de surface lisse et moins salissant. Une protection résistante aux intempéries.*
-  *Oberflächenbehandlung auf beiden Seiten für eine glatte und stärker schmutzabweisende Oberfläche. Wirksamer Schutz gegen Witterungseinflüsse.*
-  *Tratamiento en las dos caras para conseguir una superficie lisa y más limpia. Una protección resistente a la intemperie.*
-  *Trattamento sulle due facce per garantire una superficie liscia e meno sensibile allo sporco. Una protezione resistente alle intemperie.*







MADE IN
 **FRANCE**

 **REACH**
COMPLIANCE



ADVANTAGES

Avantages / Vorteile / Ventajas / Ventaggi

-  **All-weather resistant**
Résistant aux intempéries / Wetterbeständig
Resistente a la intemperie / Resistente alle intemperie
-  **Easier to clean**
Plus facilement nettoyable / Leichter zu reinigen
Más fácil de limpiar / Più facile da pulire
-  **Very good weldability**
Très bonne soudabilité / Sehr gute Schweißbarkeit
Muy buena soldabilidad / Ottima saldabilità
-  **Longer life**
Plus de longévité / Längere Lebensdauer / Mayor vida útil / Maggiore durata
-  **Suppleness**
Souple / Flexibilität / Flexibilidad / Buona flessibilità
-  **Smoother surface, less prone to soiling.**
Plus lisse et moins sujette aux salissures / Glatter und weniger schmutzanfällig
Más lisa y menos adherente para las manchas / Più liscia e meno sensibile allo sporco.

10 rue des Châteaux
 BP 109 - Z.I. La Pilaterie
 59443 Wasquehal Cedex - France
 www.dickson-constant.com
 contact@dickson-constant.com
 Tél. +33 (0)3 20 45 59 59

Performance fabrics for

Solar protection
 Outdoor furniture
 Indoor furniture
 Marine furnishing
 Flooring


DICKSON[®]
 innovative textiles for your world


GLEN RAVEN[™]

Edition September 2017 - SAS DICKSON CONSTANT - capital 12.640.000 euros - 381 347 970 R.C.S. Lille Métropole - Glen Raven[™] is a trademark of Glen Raven, Inc. - Dickson Constant is a Glen Raven company - *see general warranty conditions on www.dickson-constant.com

